




The most experienced  
tool designers in the industry  
introduce the ultimate in efficiency...

### **PS31**

**PNEUMATIC SEALLESS  
COMBINATION TOOL  
FOR STEEL STRAPPING  
WITH "Z-LOCK"  
REVERSE LOCKING  
SYSTEM**

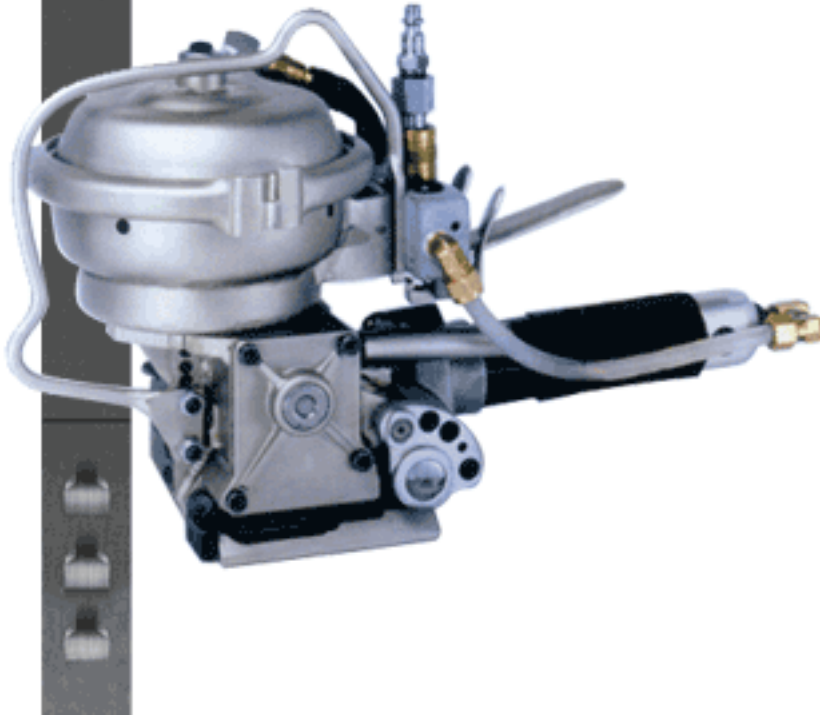

**COMING SOON**

These pneumatic tools are designed for the rapid and reliable strapping of concrete products, crates, lumber, metal products, palletized products as well as other products to be unitized with steel strapping.

These tools come equipped with our exclusive "Z-Lock" reverse locking system designed for the most demanding applications. It provides added protection against the loosening or unlocking of the sealless connection in either direction.

The PS31 series tools are specifically designed for use with high tensile steel strapping (of up to 156,000 psi / 1100 N/mm<sup>2</sup>) and may also be used with regular duty strapping for much improved durability. For use with strapping sizes from 3/4" x .025" (19 mm x 0.635 mm) to 3/4" x .031" (19 mm x 0.80 mm).

Two buttons control the entire operation of tensioning, sealing and cutting.

The design of the sealing mechanism assembly allows easy access for strapping.

The proven patented design provides much improved seal joint efficiency compared with other tools in its category.

With the fewest individual parts and components, less maintenance and repair is required compared with other tools in its category. Replacement of parts is very simple, and takes only a few minutes to replace the feedwheel, gripper, knife,

punch or die. Manufactured from only the most durable materials, this tool provides unsurpassed reliability.

#### TECHNICAL SPECIFICATIONS

<b>Model Number</b>	<b>Strap Width</b>	<b>Strap Thickness</b>
PS31-1	3/4" (19 mm)	.025" - .031" (0.635 mm - 0.80 mm)

<b>Weight</b>	26.2 lbs (11.3 kg)
<b>Base Length</b>	4.5" (115 mm)
<b>Base Width</b>	3.0" (75 mm)
<b>Height</b>	9.8" (250 mm)
Tension up to 2100 lbs. (9500 N)	
Working air pressure 65 psi (4.5 bar)	

[Click here to Print](#)